


CF1 Series

乾式單板電磁離合器-法蘭固定型 Electromagnetic Power-Applied Friction Clutch - Flange Mounted

附導座 with hub

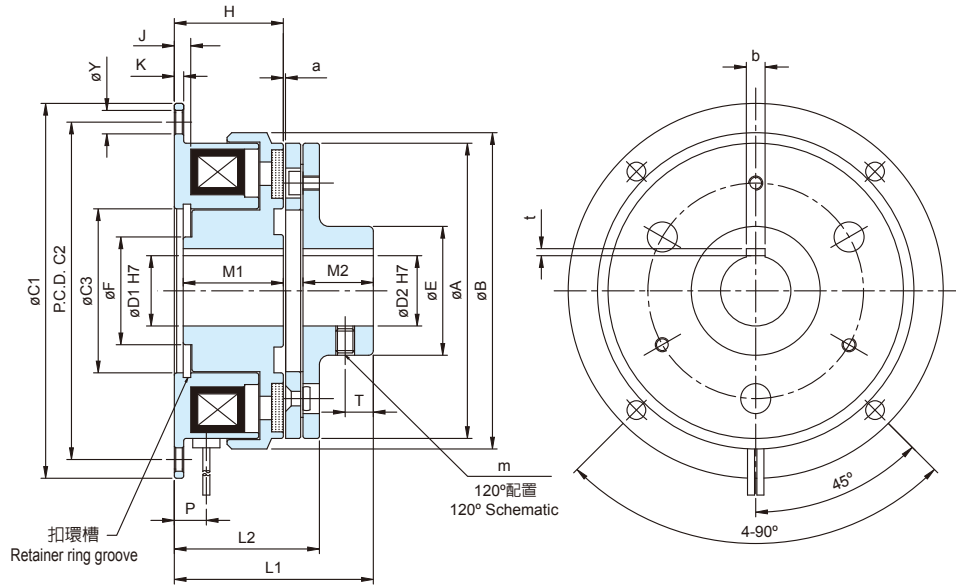

型號 MODEL	CF10S6AA(AB)	CF11S5AA(AB)	CF12S5AA(AB)	CF1005AA(AB)	CF1010AA(AB)	CF1020AA(AB)	CF1040AA(AB)	
靜摩擦轉距 Static Friction Torque [kgm](Nm)	0.55 (5.5)	1.1 (11)	2.2 (22)	4.5 (45)	9 (90)	17.5 (175)	35 (350)	
動摩擦轉距 Dynamic Friction Torque [kgm](Nm)	0.5 (5.0)	1.0 (10)	2.0 (20)	4 (40)	8 (80)	16 (160)	32 (320)	
功率 Power [24V](W) at 20°C	11	15	20	25	35	45	60	
徑 方 向 Radius	A	63	80	100	125	160	250	
	B	67.5	85	106	133	169	264	
	C1	80	100	125	150	190	290	
	C2	72	90	112	137	175	270	
	C3	35	42	52	62	80	100	
	D1	15 (12)	20 (15)	25 (20)	30 (25)	40 (30)	50 (40)	60 (50)
	D2							
	E	27.5	31	41	49	65	83	105
	F	23(21)	28	40	45	62	77	100
Y	5	6	7	7	9.5	9.5	11.5	
軸 方 向 Shaft	H	24	26.5	30	33.5	37.5	44	51
	J	3.5	4.3	5	5.5	6	7	8
	K	2	2.5	3	3.5	4	5	6
	L1	43.05	51.3	60.9	70.8	85	101.2	118.5
	L2	31.55	35.3	40.9	46.8	54	65.2	75.47
	M1	22	24.1	27	30	34	40.15	47.15
	M2	15	20	25	30	38	45	54
	P	7.5	9.5	8.9	9.5	9.5	10.5	15.5
	T	6	8	10	12	14	18	22
	m	2-M4	2-M5		2-M6	2-M8		2-M10
	a	0.2 (±0.05)			0.3 (+0.05/-0.1)		0.5 (-0/-0.2)	
	b	5 (4)	5 (5)	7 (5)	7 (7)	10 (7)	12 (10)	15 (12)
	t	2.3 (1.8)	2.3 (2.3)	3.3 (2.3)	3.3 (3.3)	3.8 (3.3)	3.8 (3.8)	5.3 (3.8)
重量 Weight (kg)	0.5	0.91	1.66	3.05	5.4	10.5	18.7	
保護素子 Protective device	07D470K	07D470K		10D680K	14D680K		20D680K	