


■ BRAKING UNIT - FBU(15kW ~ 37kW)



■ DIMENSIONS

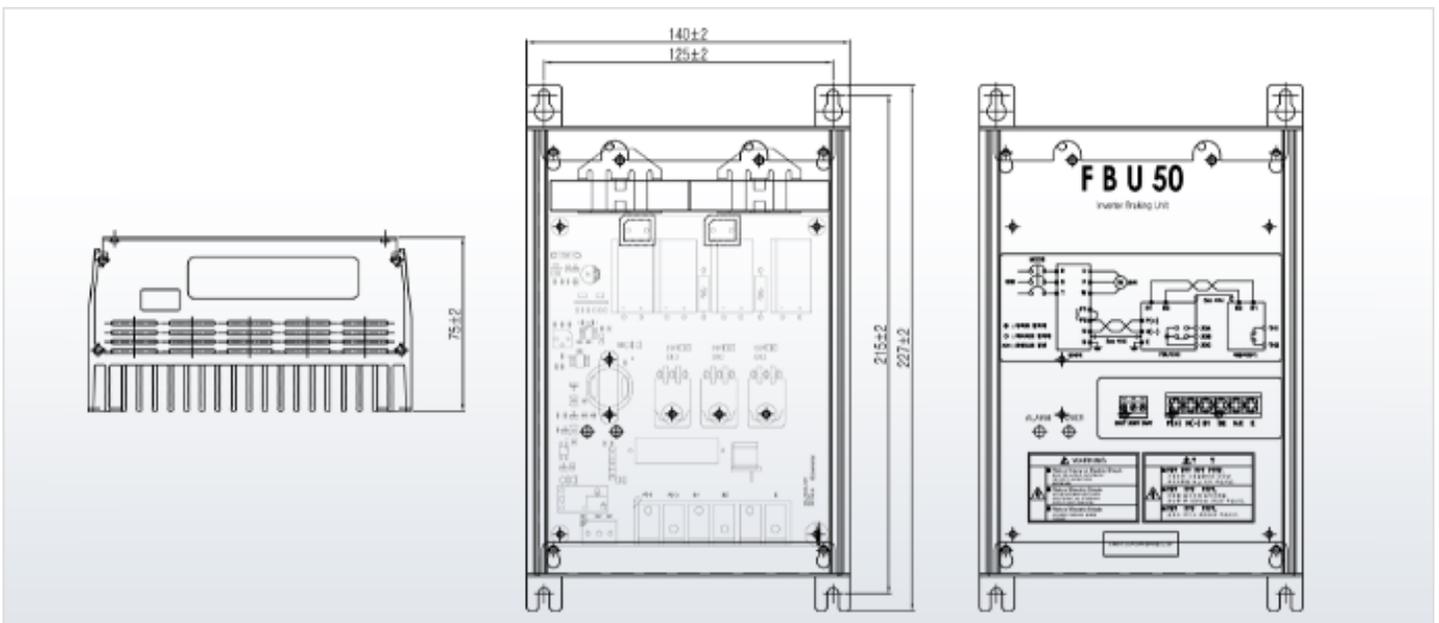

■ SPECIFICATIONS

Model	FBU015-2S	FBU022-2S	FBU037-2S	FBU015-4S	FBU022-4S	FBU037-4S
Inverter capacity	11kW~15kW	18.5kW~22kW	30kW~37kW	11kW~15kW	18.5kW~22kW	30kW~37kW
Max. current power	AC 200V / DC 400V			AC 400V / DC 800V		
Output power	DC 360V ± 2%			DC 752V ±2%		
Resistance type	Depends on Inverter type					
Torque(%)	150	150	150	150	150	150
Enable duty(Ed) -※	10%	10%	10%	10%	10%	10%
Ambient temperature	-10°C ~ 40°C					
Humidity	Relative humidity is below 90RH (remain not moisturizing)					
Cooling	Air cooling					
Environment	Remove corrosion gas residual and ignition gas resident from the inside panel					

※ NOTE : Operating time and enable duty is based on braking unit. Braking resistance has fixed 10% Ed. If Ed is 30%, then increase the capacity of resistance three times than fixed.

▣ HOW TO ORDER

FBU	015	4		S			
Model	Inverter Capacity	Voltage		Operating voltage			
				200V		380V	
		2	200V	S	DC 360V	S	DC 752V
		4	400V	S	DC 360V	H	DC 725V
				S	DC 360V	Y	DC 640V